





1/21

FIG. 1

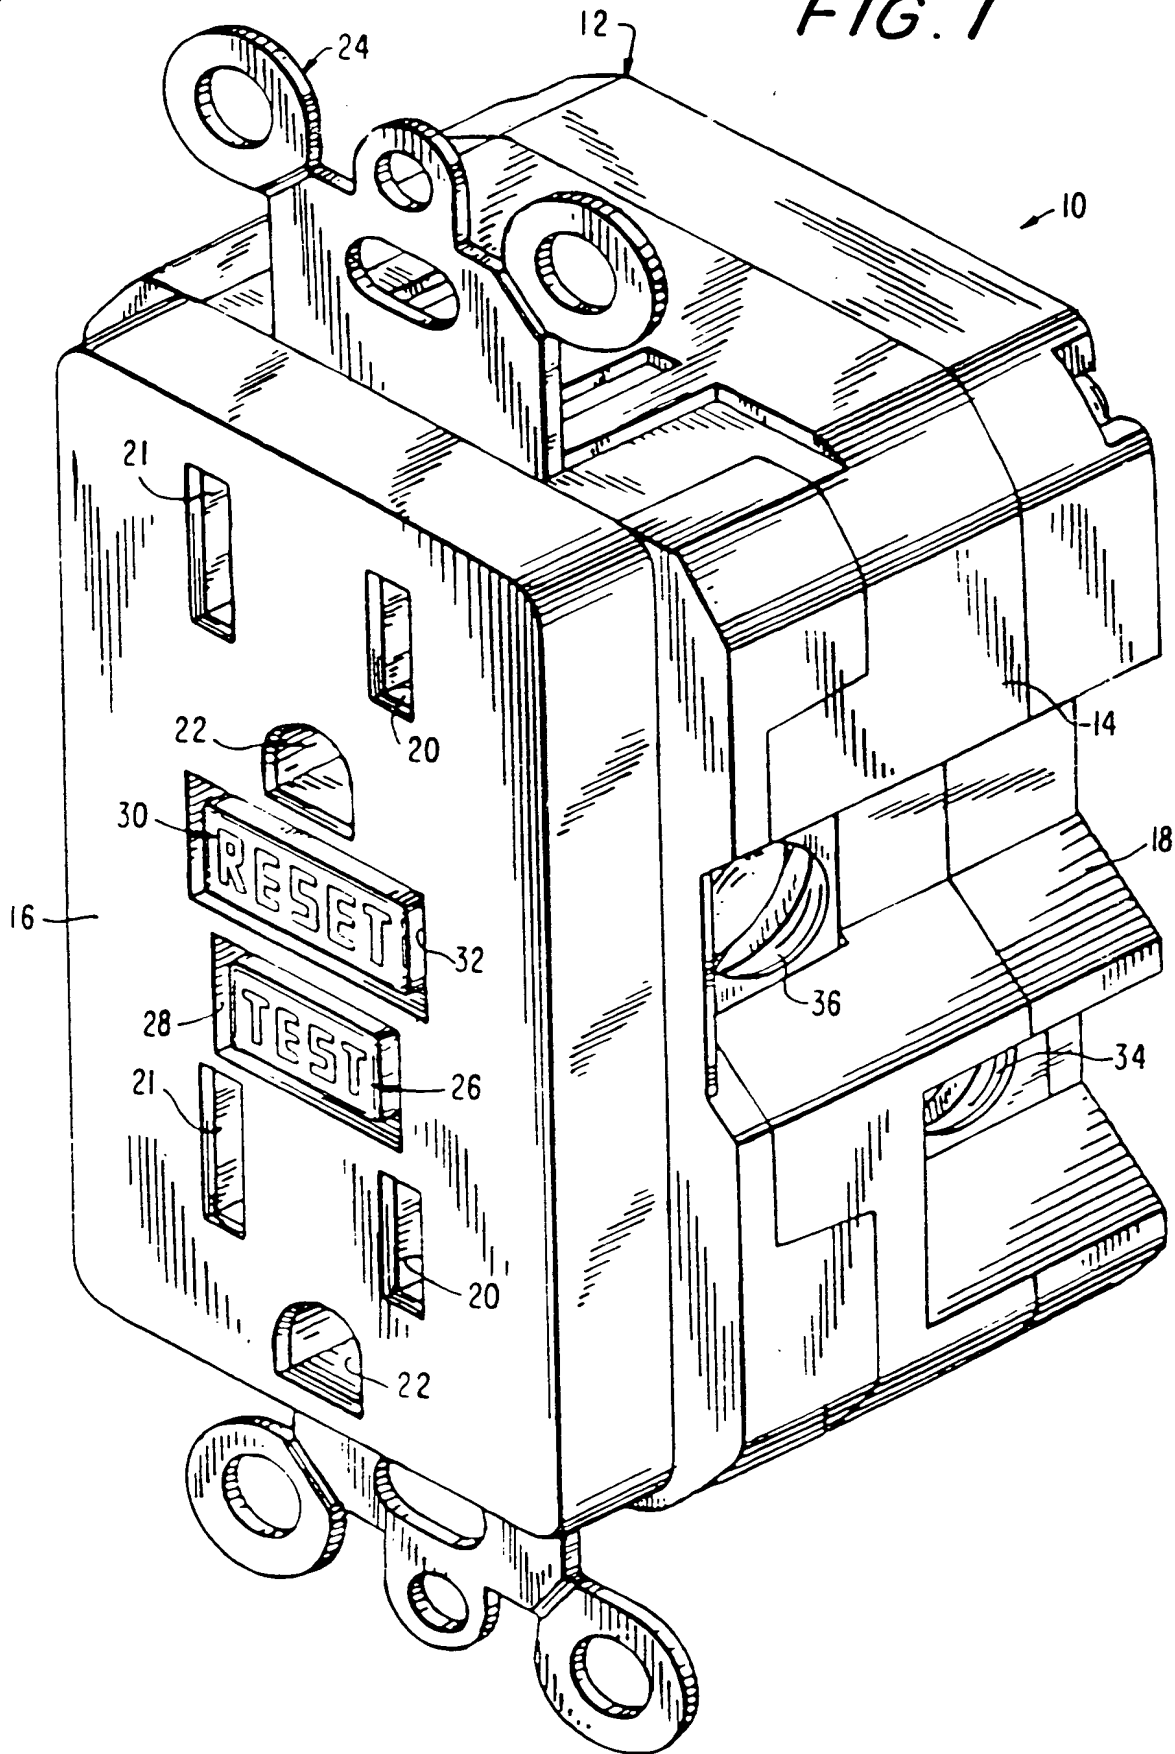

2 / 21

FIG. 2

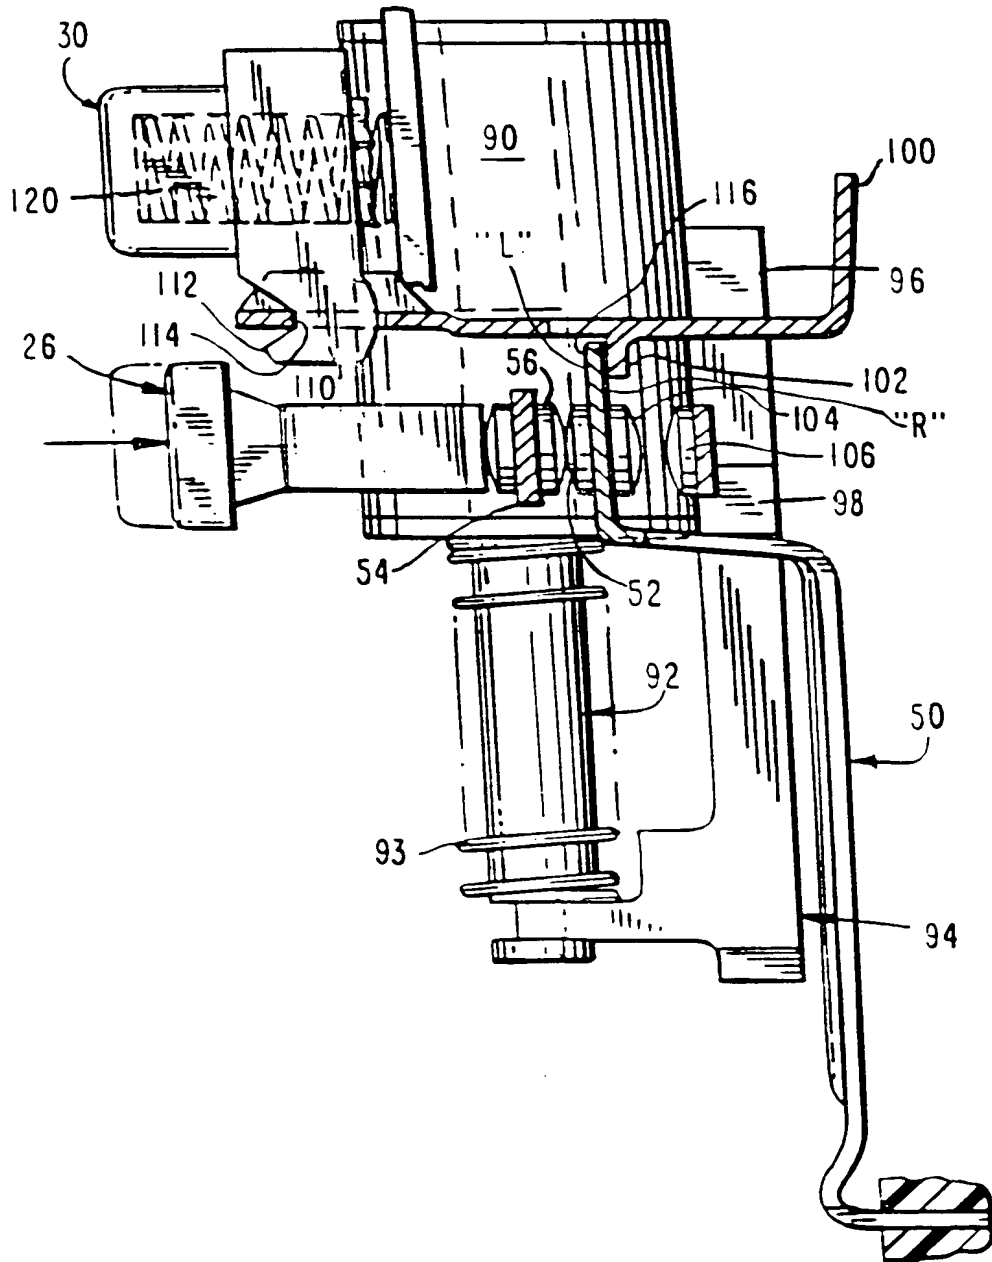

3/21

FIG. 3



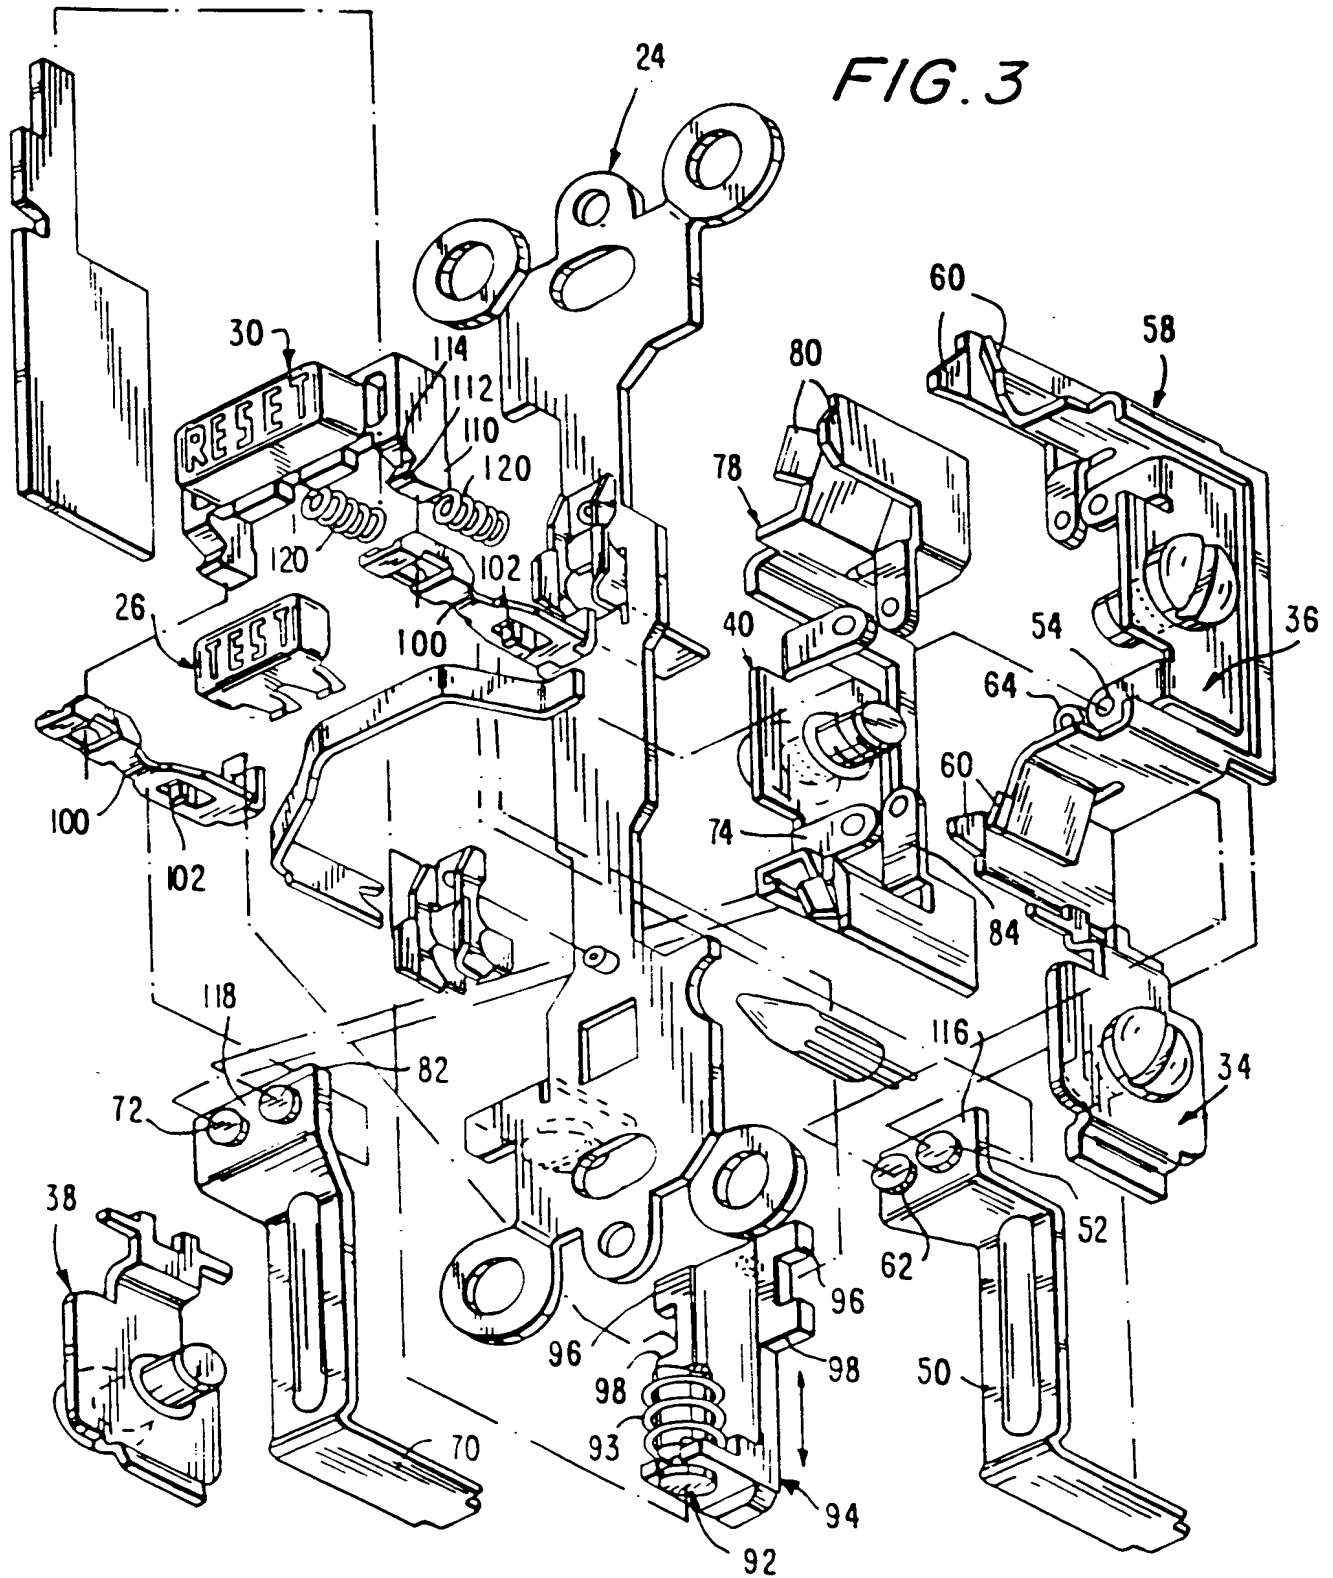


FIG. 4 4/21

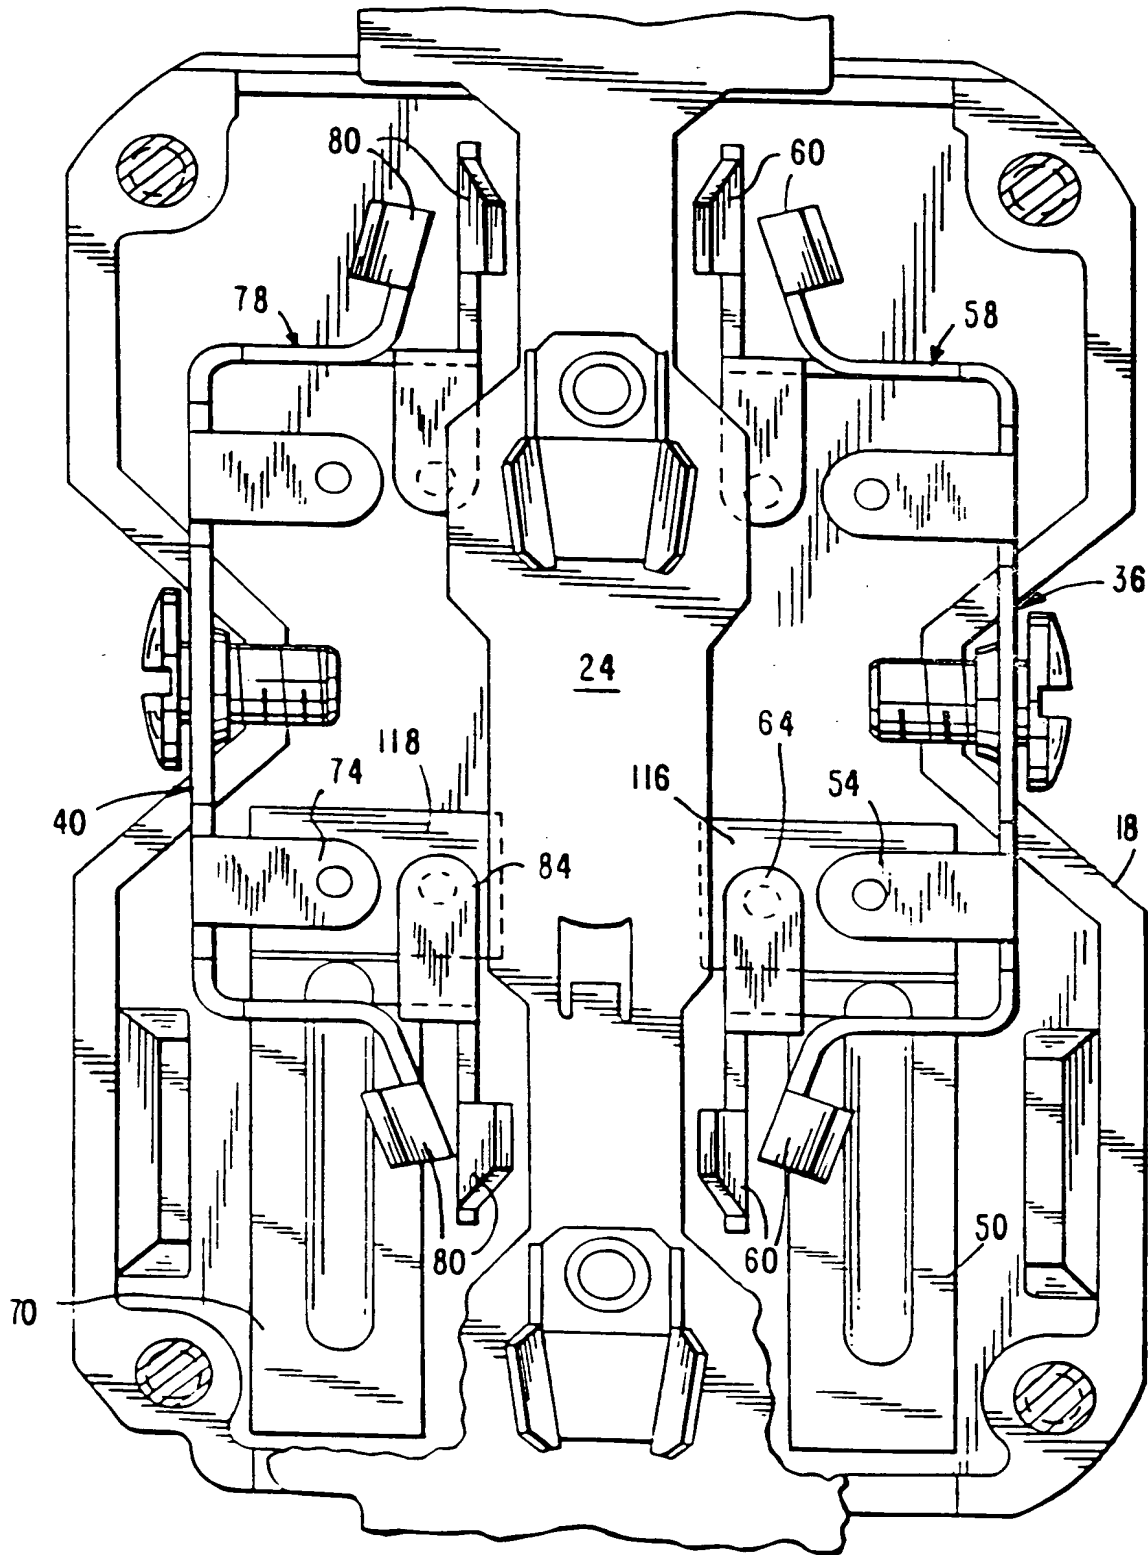


5/21

FIG. 5

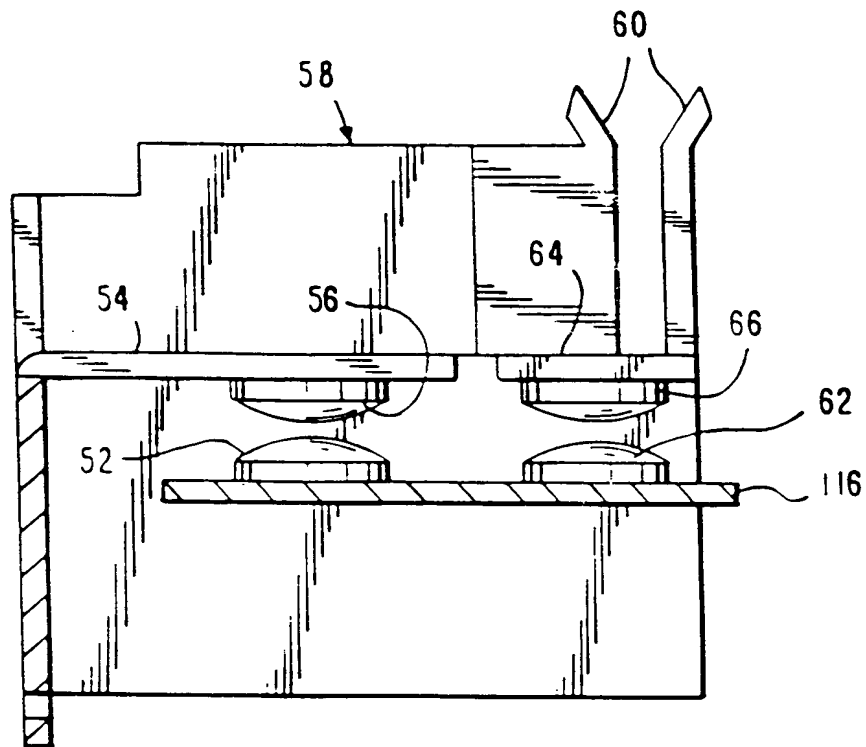


6/21

FIG. 6

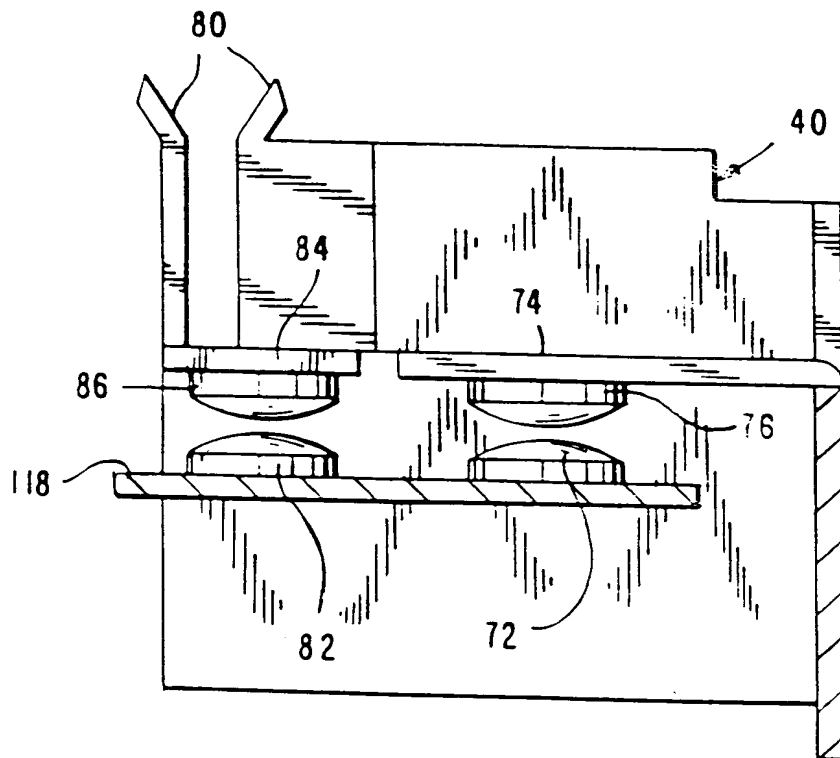

8/21

FIG. 8

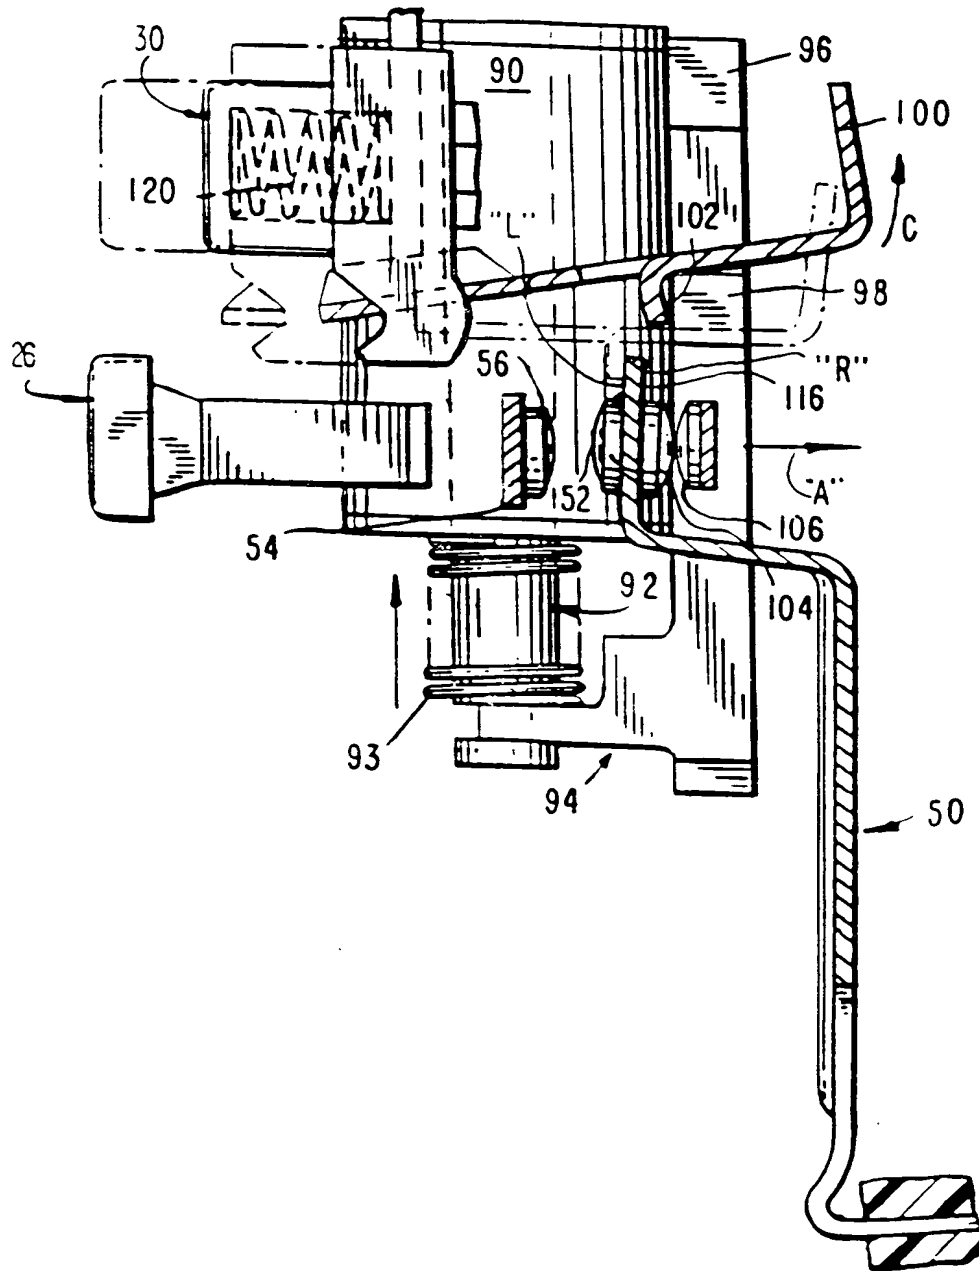

[illegible]

FIG. 11 11/21

FIG. 11 is a cross-sectional view of a mechanical assembly. The assembly includes a housing 102 with a vertical wall 100 and a horizontal wall 98. A spring 30 is mounted on a pin 120, pushing against a component 50. A vertical rod 52 passes through the housing, with a nut 54 and a washer 56 on its left side. A component 96 is mounted on the right side of the rod. A circular feature 34 is visible on the right side of the housing. A vertical line 24 is shown at the bottom left. Various other components are labeled with numbers 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120.



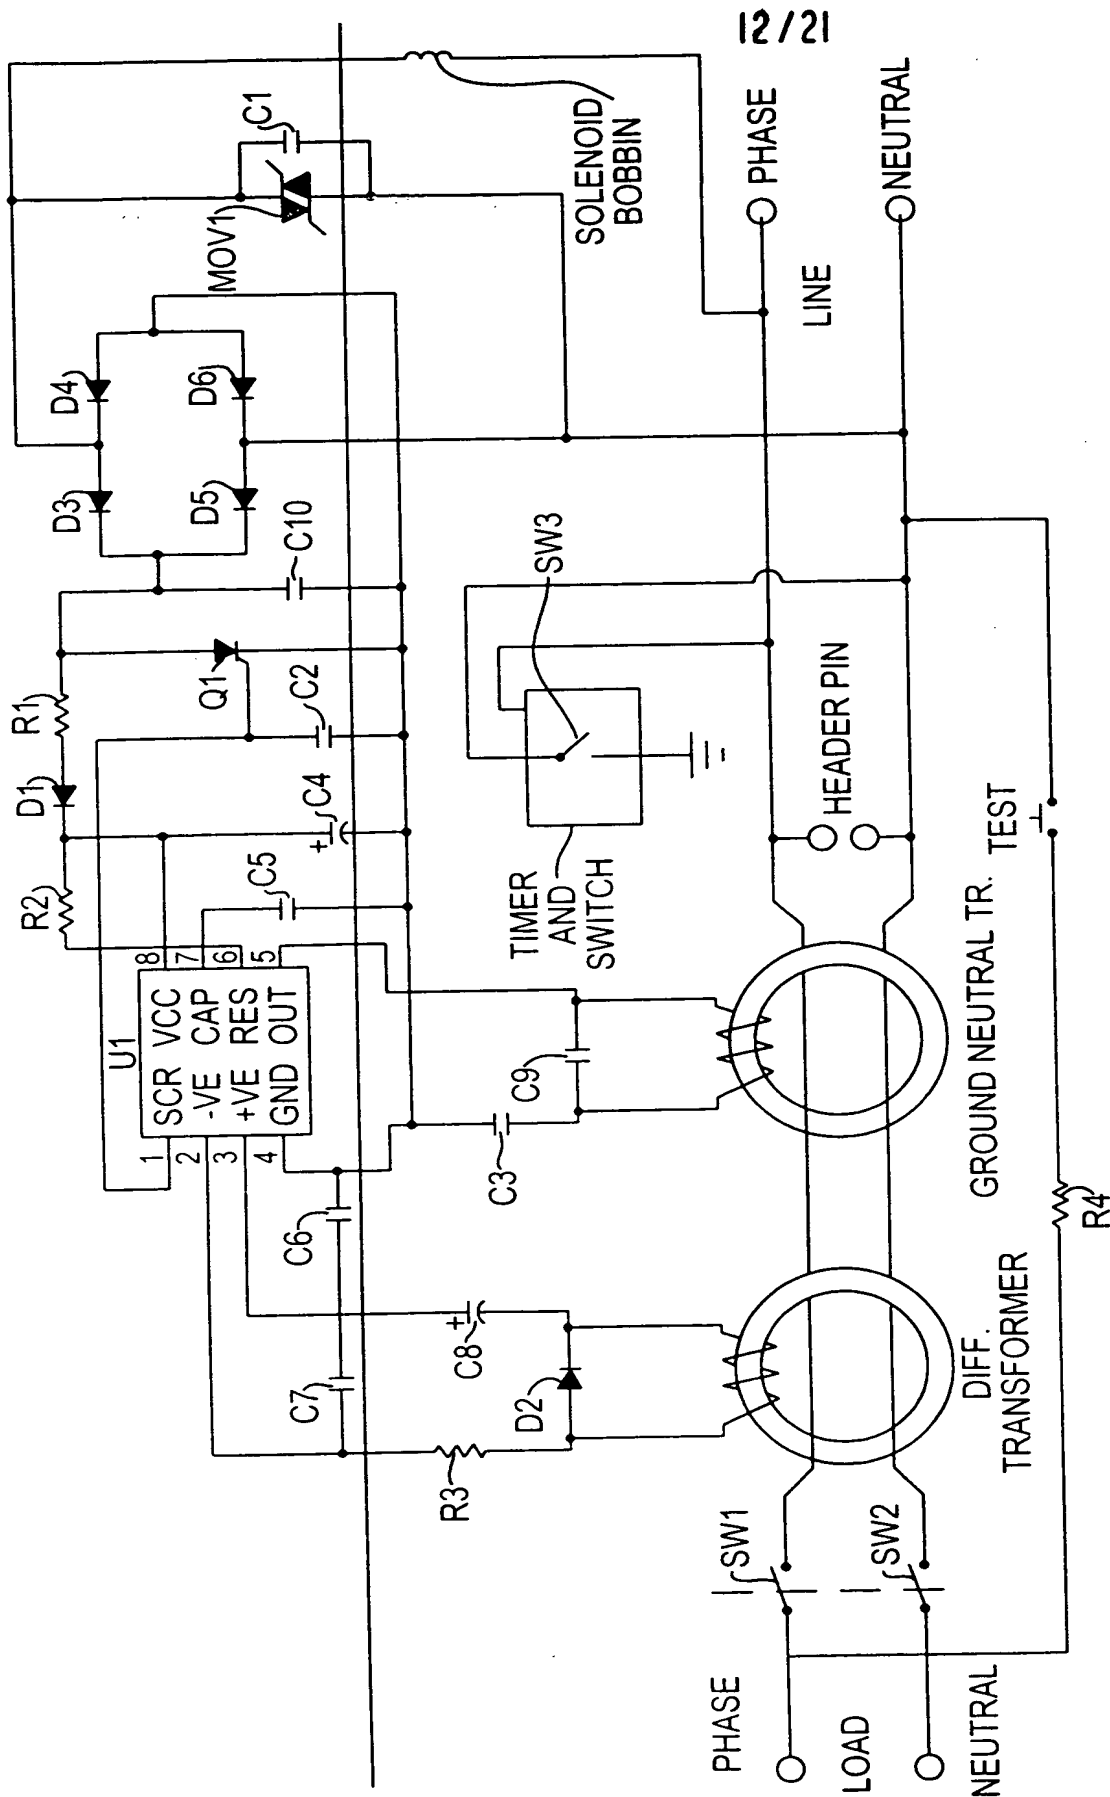


FIG. 12

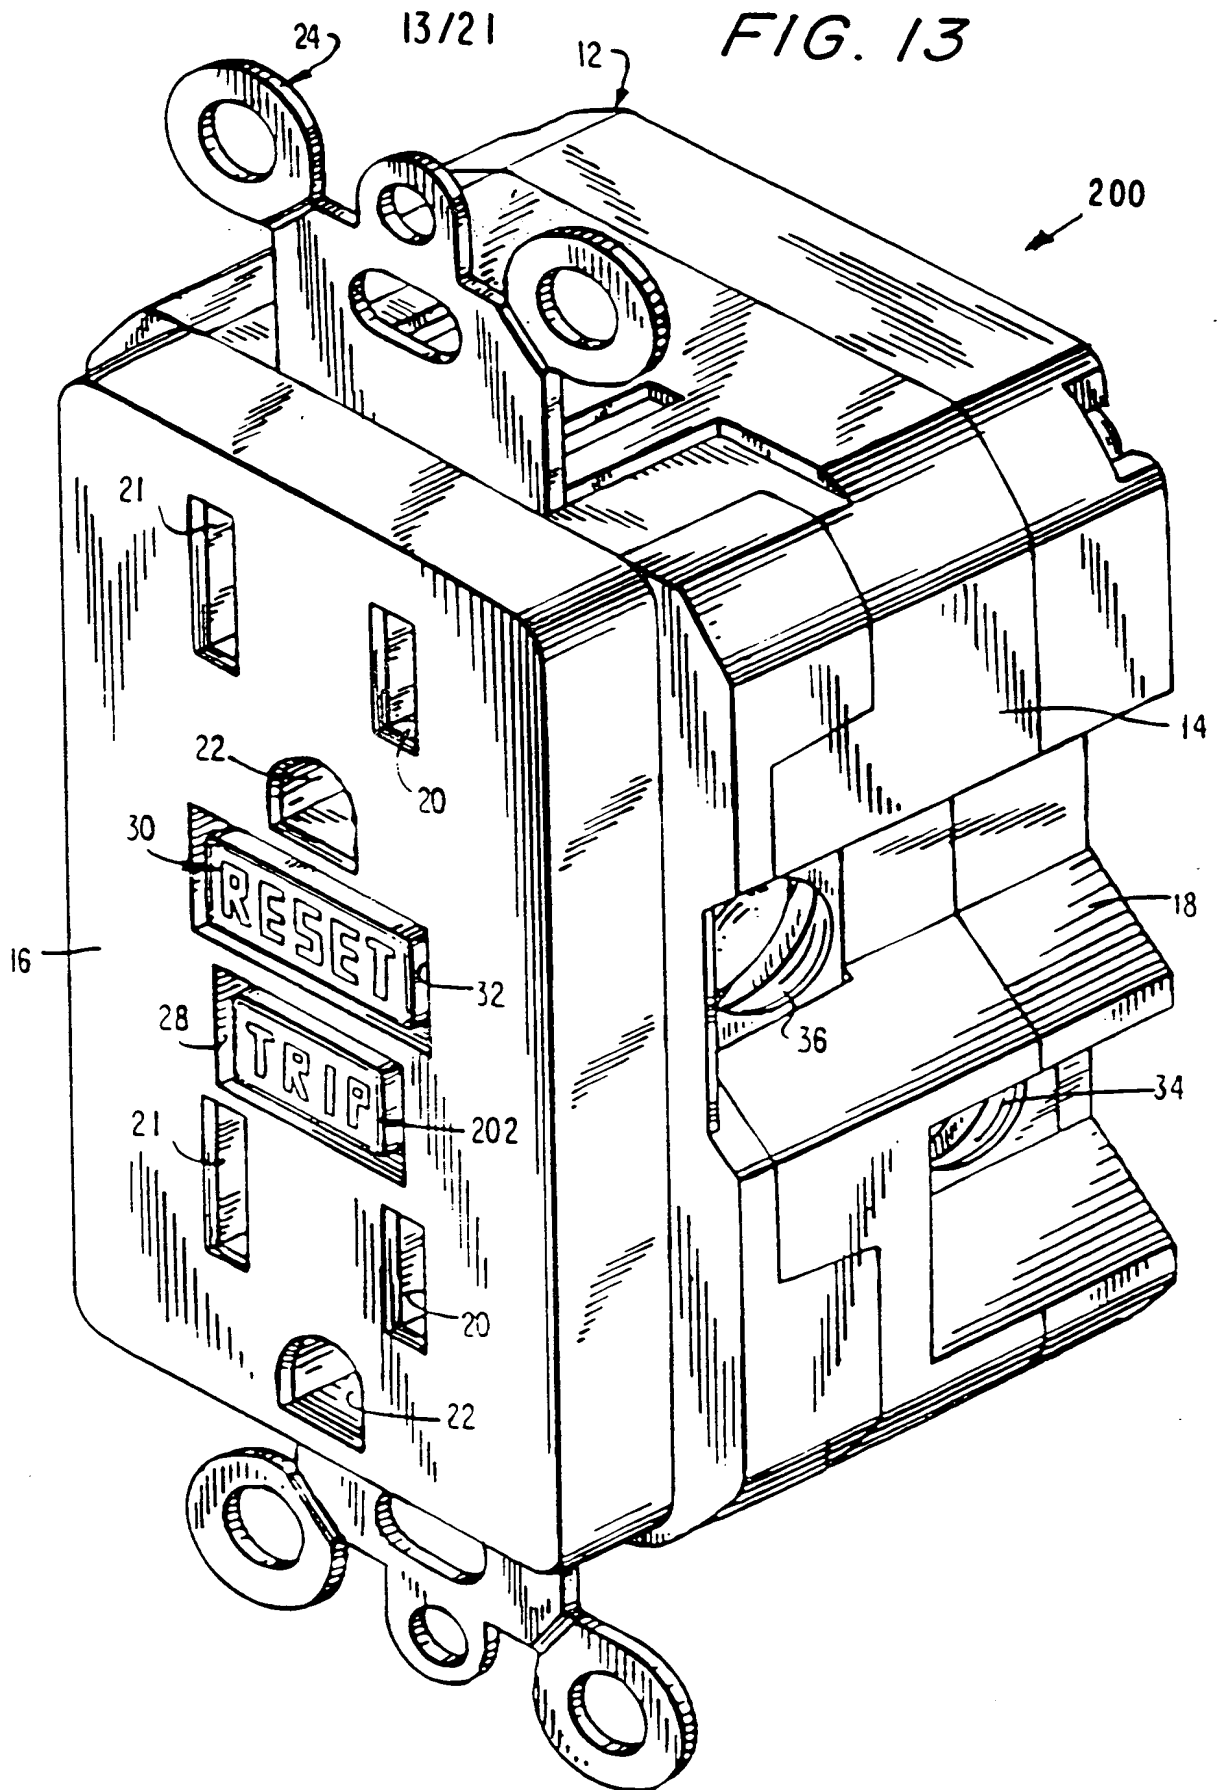


14/21

FIG. 14

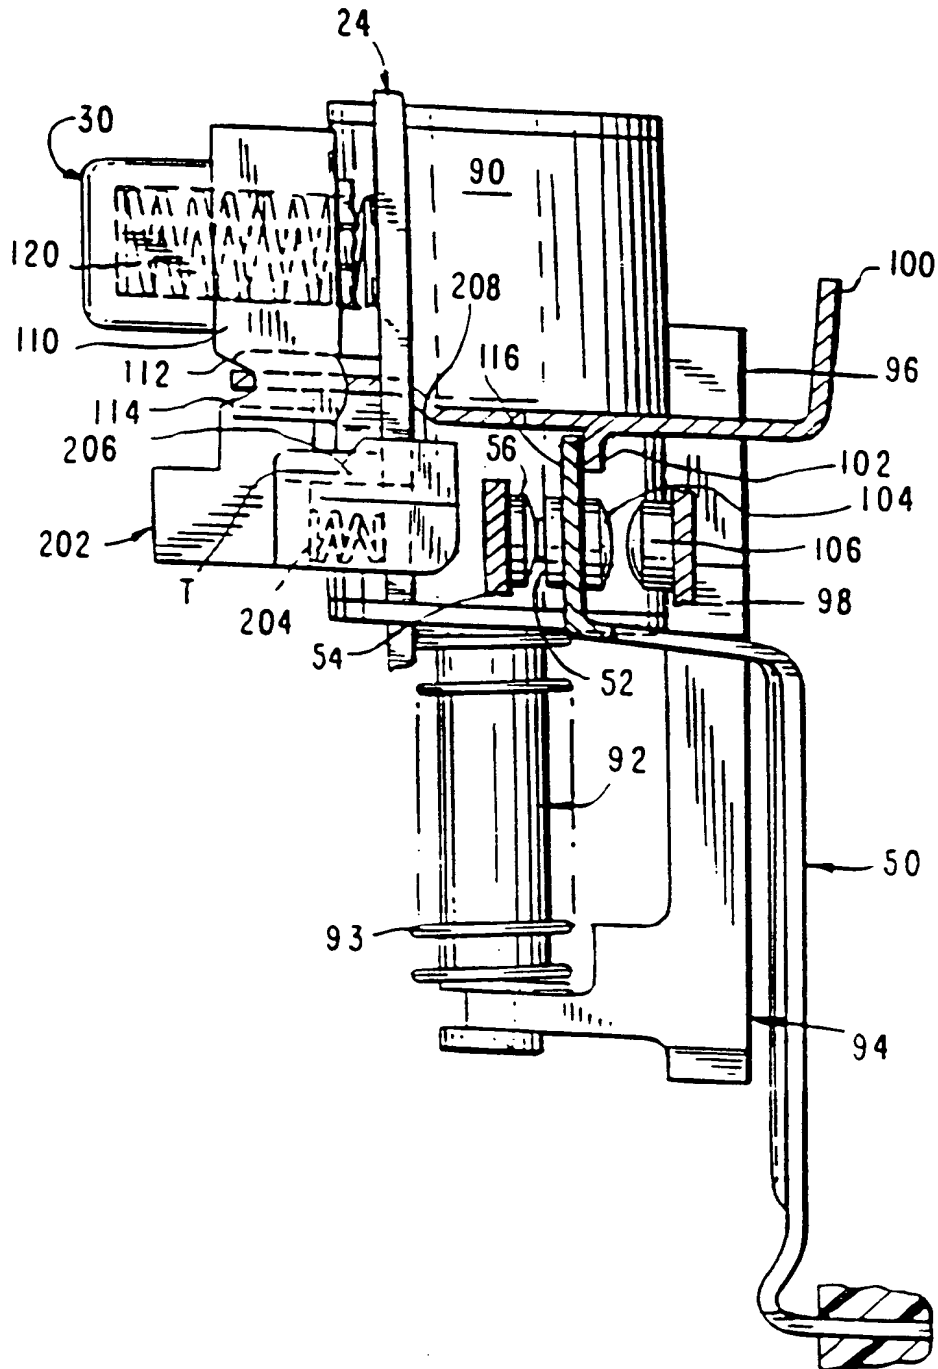


15 / 21

FIG. 15

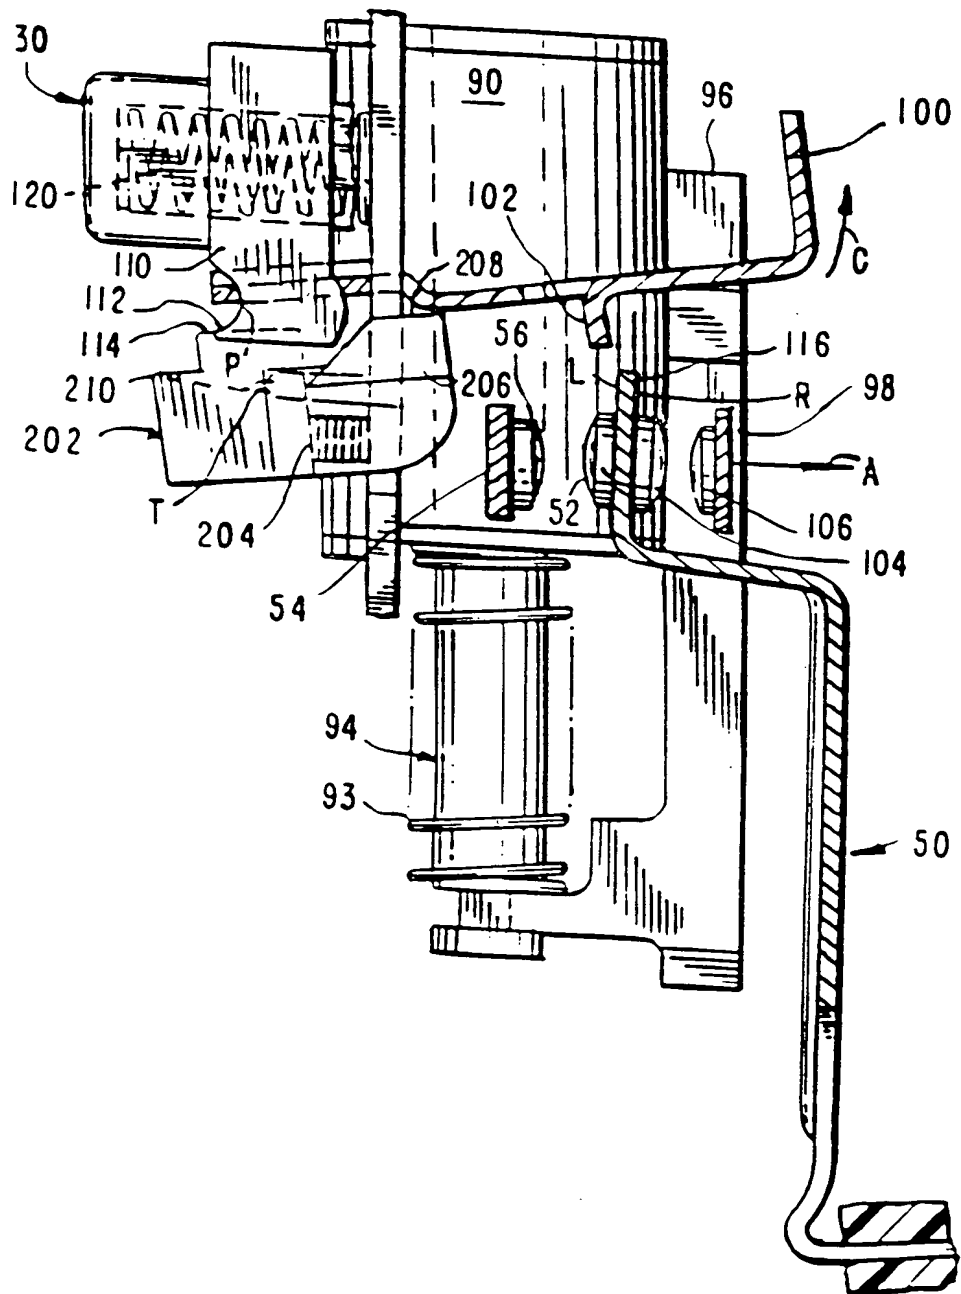


16/21

FIG. 16

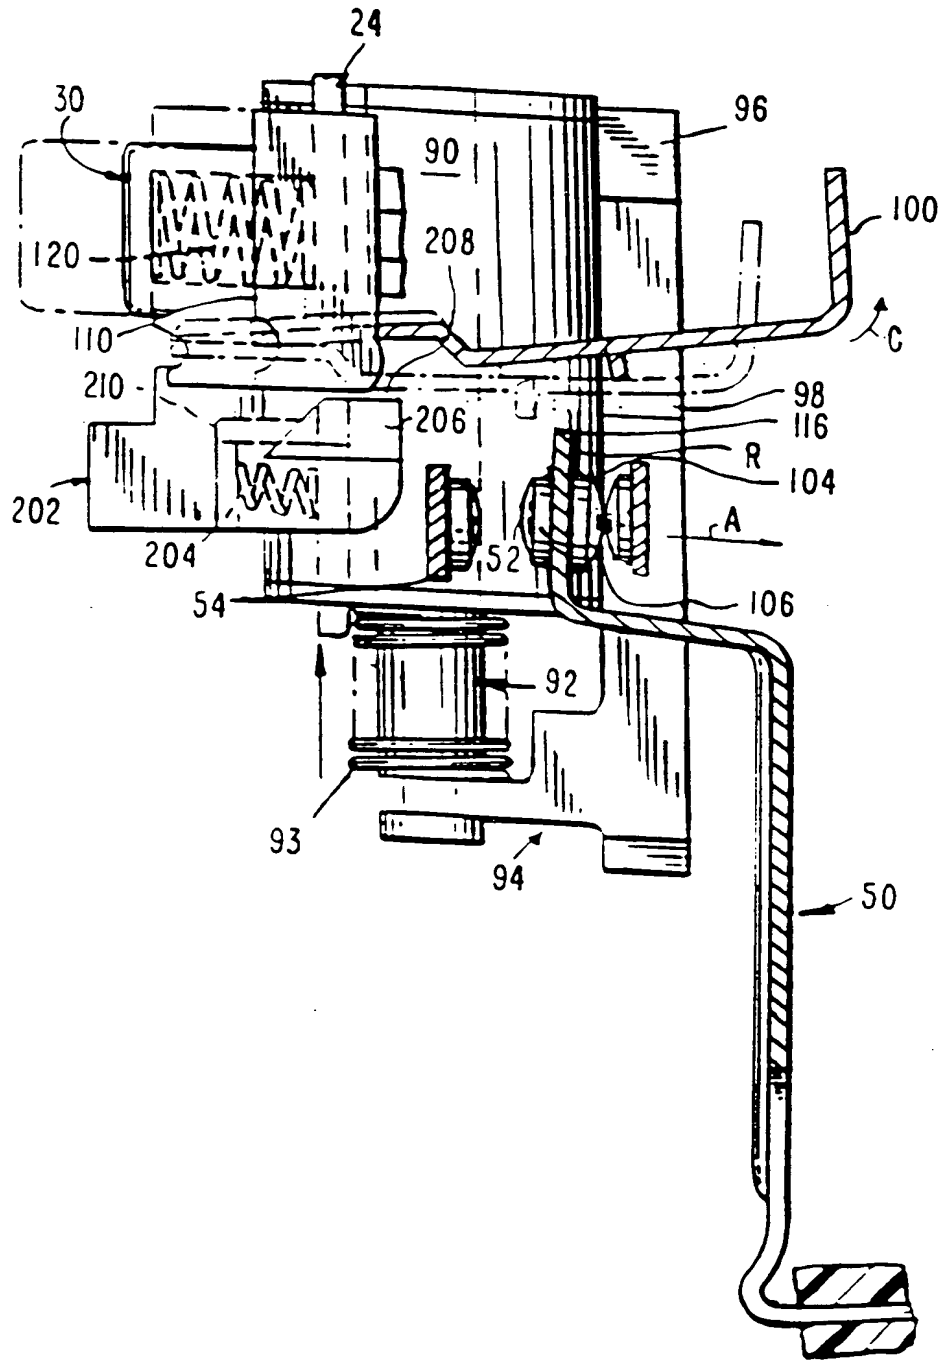


17/21

FIG. 17

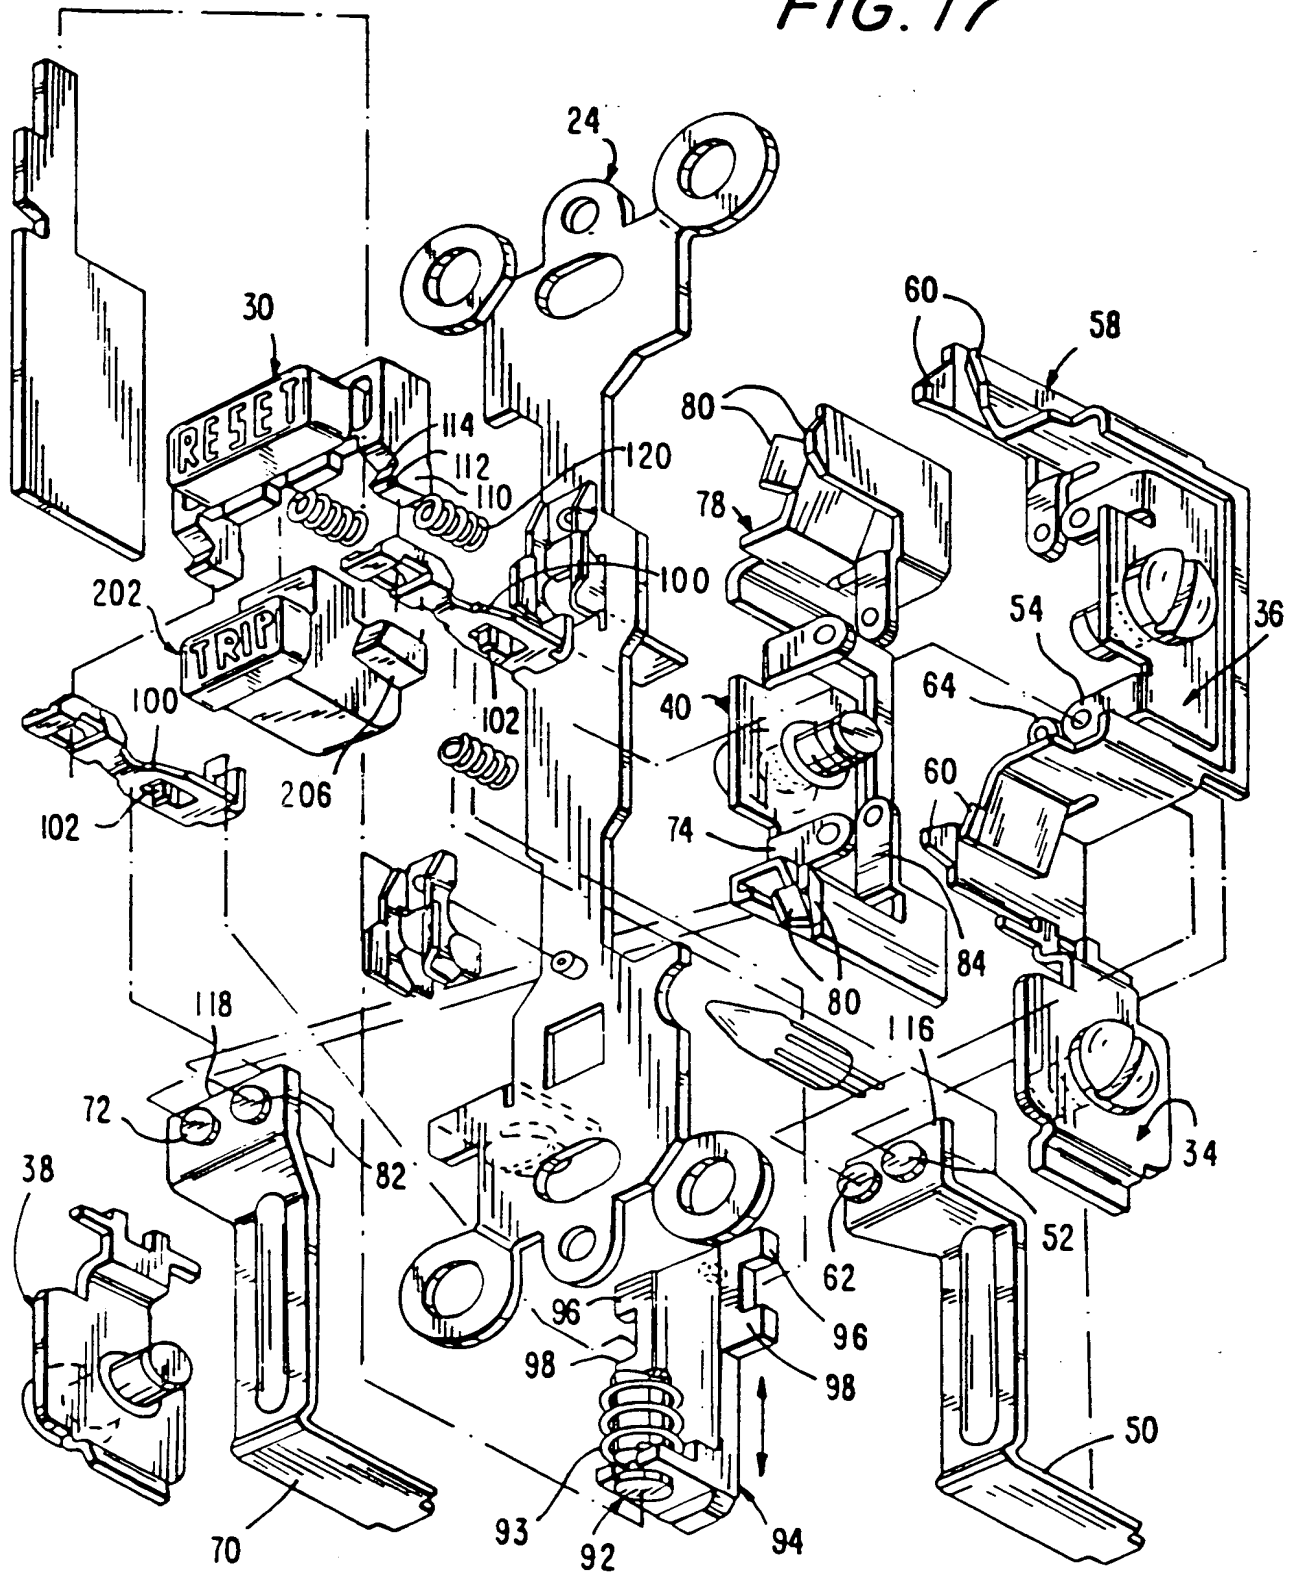



20/21

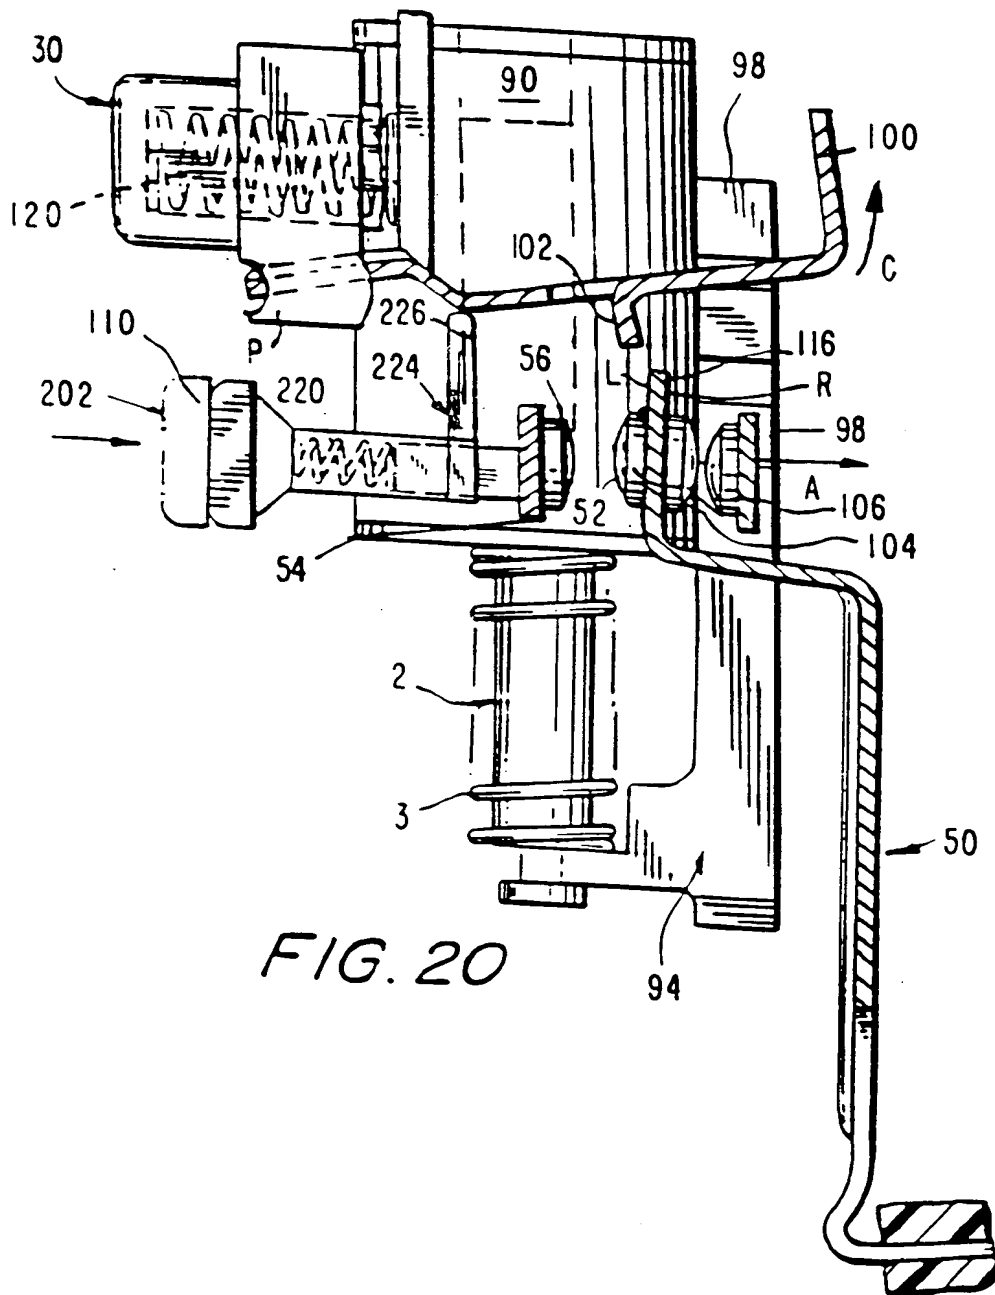

21/21

FIG. 21

